
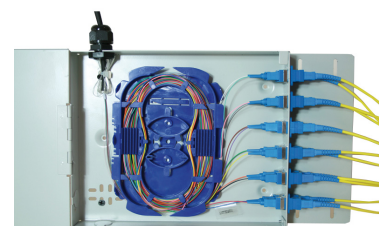
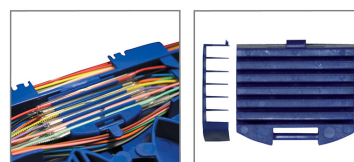
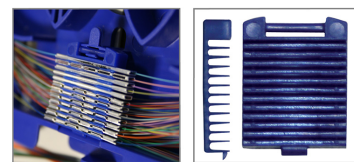


## Speedway Fiber Splice Tray

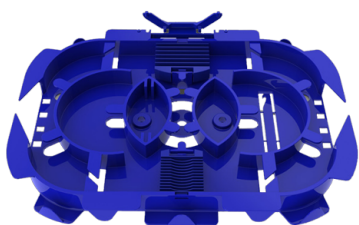

Introducing the revolutionary new Speedway splice tray with unrivaled ease of use and flexibility. Featuring a unique external fiber pathway and pivoting splice holder arrangement this tray redefines the concept of splice management, combining fiber management and splicing control in one product. Due to its accommodating internal dimensions the Speedway splice tray is able to comfortably hold 24 splices with either heatshrink or crimp German style splice protectors with up to 900µm buffered fibers.

## FEATURES/BENEFITS

- Unique external fiber pathway allows easy storage of excess fiber and multi-directional routing of entry and exit fibers
- Spacious interior maintains 30mm fiber bend radius and allows storage of either 250µm or 900µm buffered fiber
- Internal management allows multiple fiber routing options including cross over
- Pivoting splice holders allow uninterrupted control of fiber prior to splicing and during rework
- Built in fiber pick can be used to withdraw individual fibers and can be stored in the tray after use
- Will hold up to 24 splices with either heatshrink or crimp style splice protectors
- Supplied with tray hinge to maintain access to splices with stacked trays
- Transparent clip in lid supplied with every tray
- Cable tie points to secure fiber on entry and exit
- Mountable via central hole, DIN style holes or double sided foam adhesive pad



## APPLICATIONS

- Fiber management
- Internal and external
- Wall boxes
- Patch panels

SPECIFICATIONS

| ELEMENT                     | VALUE                                                      |
|-----------------------------|------------------------------------------------------------|
| Width                       | 168mm                                                      |
| Depth                       | 124mm                                                      |
| Height                      | 13mm                                                       |
| Net weight                  | 81g                                                        |
| Material                    | ABS                                                        |
| Colour                      | Blue                                                       |
| Operating temperature       | -40°C to +60°C                                             |
| Designed in accordance with | TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, |
| Compliant to                | RoHS, Reach/SVHC                                           |

TECHNICAL DRAWING

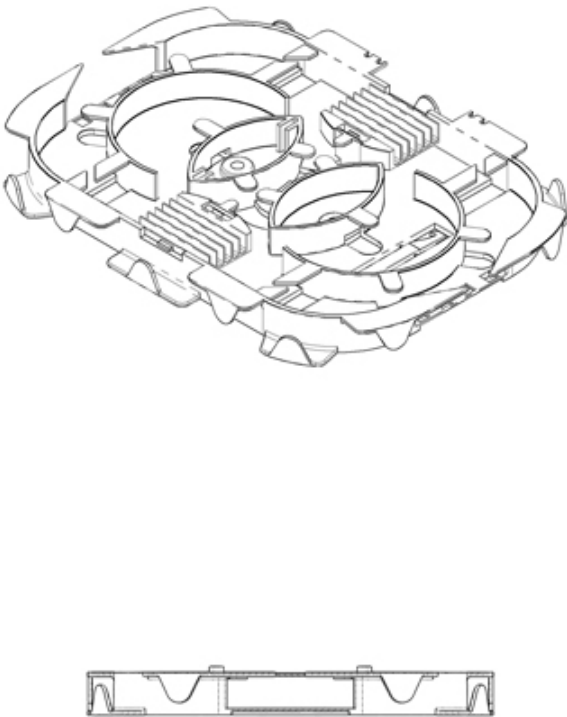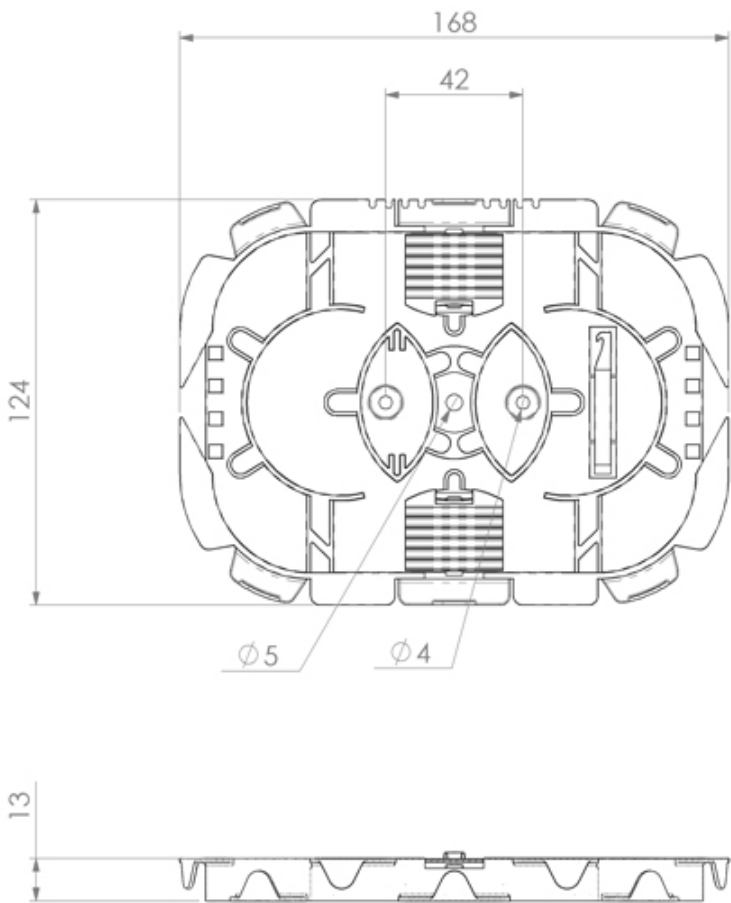

## ORDERING INFORMATION

| DESCRIPTION                                   | PART NUMBER |
|-----------------------------------------------|-------------|
| Speedway Fiber Splice Tray Heat Shrink        | SPT01       |
| Speedway Fiber Splice Tray Crimp German Style | SPT02       |



SCAN QR FOR PRODUCT PAGE

## FURTHER INFORMATION

- For additional information please contact your sales representative
- To view the product 360 visit the product page (Scan the QR code or visit the link below)
- Downloaded from <https://www.aflhyperscale.com/product/speedway-fiber-splice-tray>
- AFL Hyperscale reserves the right to make changes in this datasheet at any time without notice
- Information in this document is correct as of February 27, 2019

## Europe

+44 (0) 1908 441 144  
emeasales@aflhyperscale.com  
© AFL Hyperscale 2019

## Americas

+1 866 814 8615  
usasales@aflhyperscale.com

## Middle East &amp; Africa

+971 4 404 9606  
mesales@aflhyperscale.com

## India

+91 80 46874687  
indiasales@aflhyperscale.com

## Asia Pacific

+86 755 2561 3694  
apacsales@aflhyperscale.com