




APC Smart-UPS 1000VA LCD 230V
Part Number: SMT1000I

[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Software & Firmware](#) [Options](#) [Ratings and Reviews](#)

Output

Output Power Capacity	700 Watts / 1000 VA
Max Configurable Power	700 Watts / 1000 VA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal, 57 - 63 Hz for 60 Hz nominal
Other Output Voltages	220, 240
Topology	Line Interactive
Waveform Type	Sine wave
Output Connections	(8) IEC 320 C13  (2) IEC Jumpers

Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Input voltage range for main operations	160 - 286V
Input voltage adjustable range for mains operation	151 - 302V

Other Input Voltages

220, 240

Batteries & Runtime


Battery Type Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof

Typical recharge time 3 hour(s)

Replacement Battery [RBC6](#)

RBC™ Quantity 1

Runtime Graph

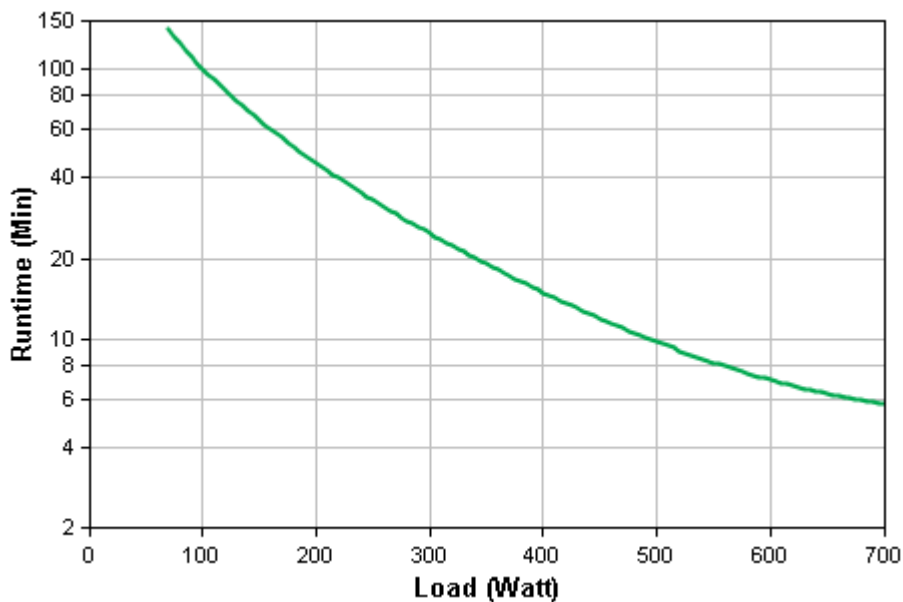

Hover over the line on the graph above to view the runtime at any desired load


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Energy Use/Efficiency

Load	Efficiency
25%	94.8%
50%	97.2%
75%	98.0%
100%	98.3%

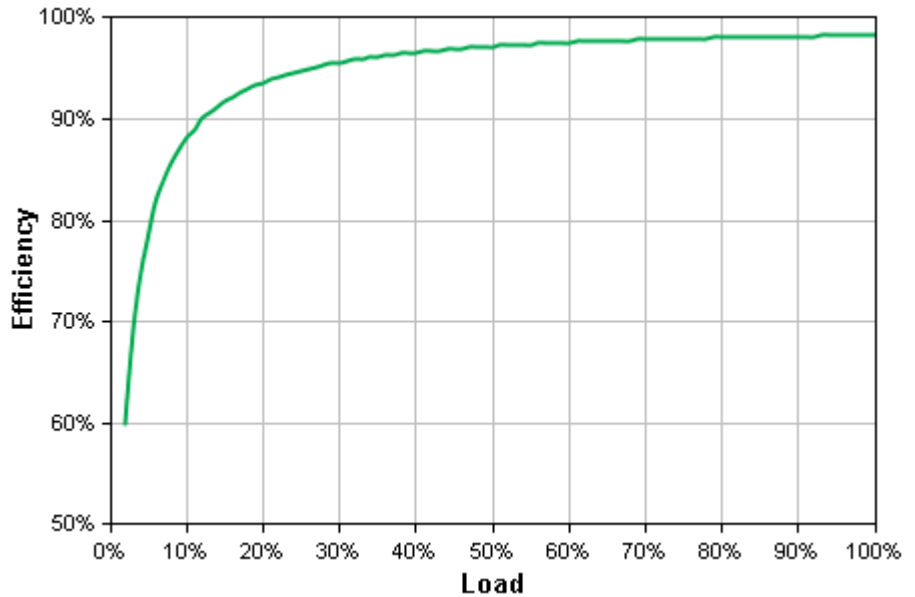

Hover over the line on the graph above to view the efficiency at any desired load

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

Communications & Management

Interface Port(s)	SmartSlot, USB
Available SmartSlot™ Interface Quantity	1
Control panel	Multi-function LCD status and control console
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Optional

Surge Protection and Filtering

Surge energy rating	459 Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	219.00 mm
Maximum Width	171.00 mm
Maximum Depth	439.00 mm
Net Weight	18.86 KG
Shipping Weight	22.77 KG
Shipping Height	376.00 mm
Shipping Width	328.00 mm
Shipping Depth	595.00 mm
Color	Black
Units per Pallet	12.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters

Audible noise at 1 meter from surface of unit 41.00 dBA

Online Thermal Dissipation 100.00 BTU/hr

Conformance

Regulatory Approvals C-tick, CE, EN 50091-1, EN 50091-2, VDE

Standard Warranty 3 years repair or replace (excluding battery) and 2 year for battery

Sustainable Offer Status

RoHS Compliant

REACH REACH: Contains No SVHCs

Other Environmental Compliance China RoHS

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.