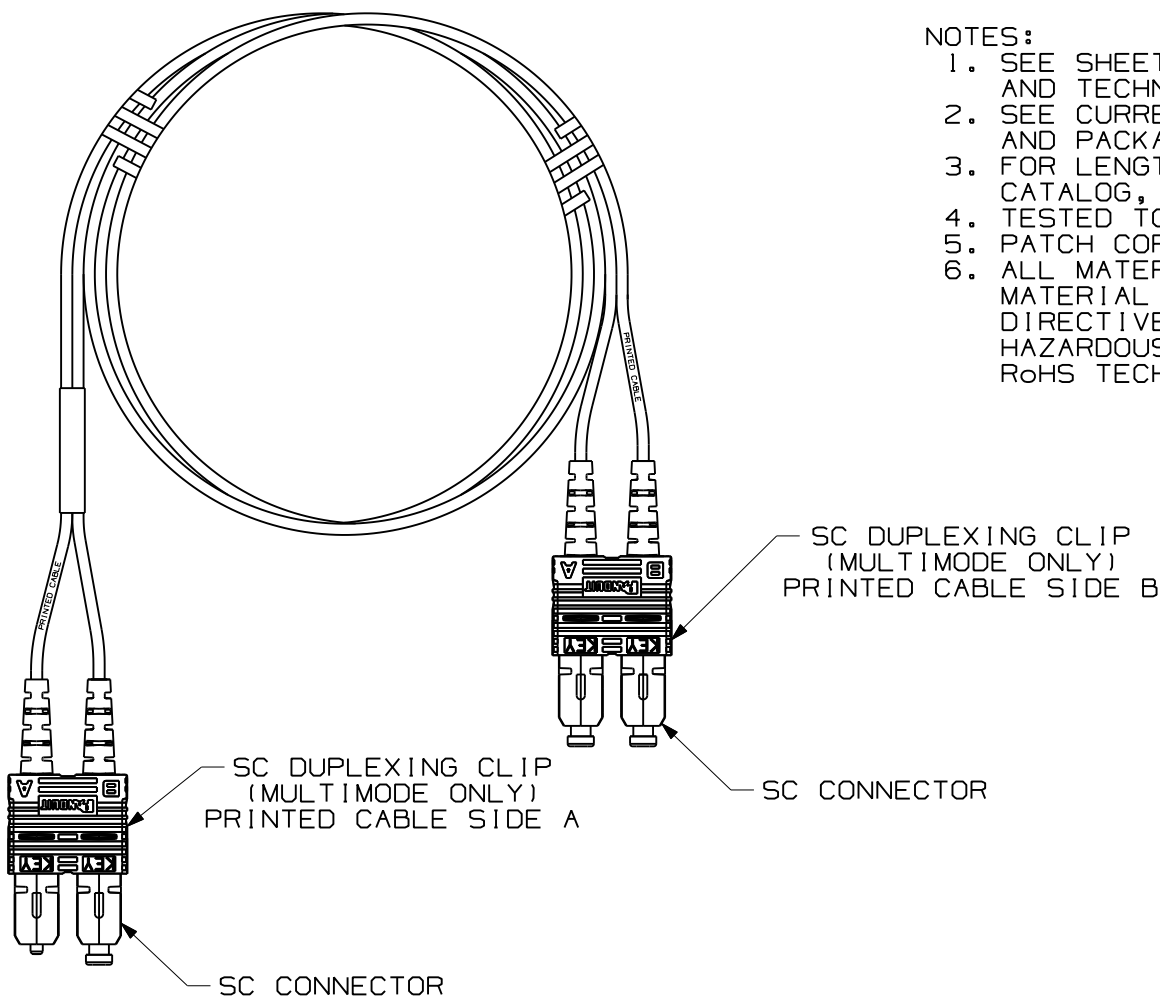




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



| | | | | | | | | | | | | | | | |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|---|--|---|--|-------------------------------------|--|
| | | | | | | | | | | FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING | | | | | |
| | | | | | | | | | |  PANDUIT ™ CORP. TINLEY PARK, ILL 60477 | | | | | |
| | | | | | | | | | |  THIRD ANGLE PROJECTION | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. | | DRAWING FILENAME M02779BA_DC/00B | |
| | | | | | | | | | | DIMENSIONAL TOLERANCES ARE: (.X) ±.03 0.8 ANGLES (.XXX) ±.010 0.3 | | SCALE NONE | | | |
| | | | | | | | | | | DRAWN BY MC | | REVIEW DRAWING NUMBERS | | PART NO. SEE SHEET 2, 3 & 4 | |
| | | | | | | | | | | DATE 04-27-07 | | DRAWING NO. 02779-09 | | SIZE A | |
| | | | | | | | | | | CHK'D RAF | | SHEET 1 OF 4 | | | |
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-09 | | | | | | | | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH | | | | | | |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| DUPLEX SC TO SC FIBER OPTIC PATCH CORD | | | | | | | |
|--|--------------|---------------------|----------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | SC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5D3-3M*Y | RISER (OFNR) | 50/125um | DUPLEX 3.0mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6D3-3M*Y | | 62.5/125um | | | | | ELECTRIC IVORY |
| FXD3-3M*Y | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOD3-3M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZD3-3M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOD3-3M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9D3-3M*Y | | 9/125um OS1 | | YELLOW | 0.50dB | 55dB | BLUE |

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-09 | | | | |



| | | | |
|---|--|---|--|
|  | | PANDUIT TM CORP. TINLEY PARK, ILL 60477 | |
|  THIRD ANGLE PROJECTION | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.008 ANGLES | |
| DRAWN BY MC | | REVIEW DRAWING NUMBERS | |
| DATE 04-27-07 | | DRAWING FILENAME M02779BA_DC/00B | |
| CHK'D RAF | | SCALE NONE | |
| | | PART NO. SEE SHEET 2, 3 & 4 | |
| | | DRAWING NO. 02779-09 | |
| | | SHEET 2 OF 4 | |
| | | SIZE A | |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| DUPLEX SC TO SC FIBER OPTIC PATCH CORD | | | | | | | |
|--|---------------|---------------------|----------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | SC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5PD3-3M* | PLENUM (OFNP) | 50/125um | DUPLEX 3.0mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6PD3-3M* | | 62.5/125um | | | | | ELECTRIC IVORY |
| FXP3-3M* | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOP3-3M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZPD3-3M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOP3-3M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9PD3-3M* | | 9/125um OS1 | | YELLOW | 0.50dB | 55dB | BLUE |

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET



| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-09 | | | | |

| | | | | | | | |
|---|--|--|--|--|--|--|--|
|  | | | | FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING | | | |
|  THIRD ANGLE PROJECTION | | | | PANDUITTM CORP. TINLEY PARK, ILL 60477 | | | |
| ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.005 ANGLES | | | | DRAWING FILENAME M02779BA_DC/00B SCALE NONE | | | |
| DRAWN BY MC | | | | REVIEW DRAWING NUMBERS | | | |
| DATE 04-27-07 | | | | PART NO. SEE SHEET 2, 3 & 4 | | | |
| CHK'D RAF | | | | DRAWING NO. 02779-09 SHEET 3 OF 4 SIZE A | | | |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| DUPLEX SC TO SC FIBER OPTIC PATCH CORD | | | | | | | |
|--|-----------------------------------|---------------------|----------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | SC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5LD3-3M* | LOW SMOKE ZERO HALOGEN (LSZH) IEC | 50/125um | DUPLEX 3.0mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6LD3-3M* | | 62.5/125um | | | | | ELECTRIC IVORY |
| FXLD3-3M* | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOLD3-3M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZLD3-3M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOLD3-3M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9LD3-3M* | | 9/125um OS1 | | YELLOW | 0.50dB | 55dB | BLUE |

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| | | | | | | | | | | FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING | | | | | |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|---|-----|---|--|-------------------------------------|--|
| | | | | | | | | | |  PANDUIT ™ CORP. TINLEY PARK, ILL 60477 | | | | | |
| | | | | | | | | | |  THIRD ANGLE PROJECTION | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.010 ANGLES | | DRAWING FILENAME M02779BA_DC/00B | |
| | | | | | | | | | | DRAWN BY MC | | REVIEW DRAWING NUMBERS | | PART NO. SEE SHEET 2, 3 & 4 | |
| | | | | | | | | | | DATE 04-27-07 | | DRAWING NO. 02779-09 | | SIZE A | |
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-09 | | | | | CHK'D | RAF | SHEET 4 OF 4 | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH | | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[F9LD3-3M3](#) [F6D3-3M1Y](#) [F9D3-3M3Y](#)