

Optical Fibre Components

LC Duplex Optical Fibre Adaptors

Optronics offers a range of quality LC adaptors which have high precision alignment sleeves for improved reliability and better reconnectability. The LC adaptors come with ceramic sleeves for singlemode and phosphor bronze sleeves for multimode. The housing is available in different colours with options for flange or flangeless body and metal, or inbuilt, clips.

Features


- > Complies with IEC 61754-20
- > High precision alignment sleeve
- > Low insertion loss and high reconnectability
- > RoHS, REACH SvHC compliant
- > Available in simplex, duplex and quad adaptors

Applications


- > Telecommunications networks
- > CATV, LAN, MAN and WAN application
- > Data processing networks
- > Cable television
- > Fibre-to-the-home
- > Premises distribution

Technical Specification

		PHOSPHOR BRONZE	CONFORMANCE
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	500		IEC 61300-2-2
Receptacle Retention force	1N - 2.5N		IEC 61754-20
Operating temperature	perating temperature -25 to +70, 12 cycles		IEC 61300-2-22



MODE	TYPE	COLOUR	PART NO. DUPLEX	CONFIGURATION	
SM	APC	GREEN	LCAPCUDGREEN		
SM	PC	BLUE	LCDPXBLUE	Flange with two holes and SC footprint with metal	
MM	PC	BEIGE	LCDPXBEIGE	clips	
MM	PC	AQUA	LCDPXAQUA/S	clips	

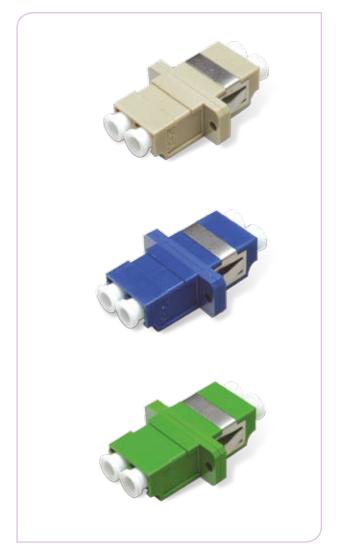

■ Internal Management

External ManagementTools & Test Equipment

Cleaning & Consumables

Telecommunication ProductsCopper Structured Cabling Solutions